

機械選択情報 Machinery Sale Information



CMC CO., LTD

<TEL・FAX> (81) 277-46-9165 / (81) 277-46-9166

<E-Mail> cmcmac@cmcmachinery.co.jp

Date:2023.May.10




Listing No.22174-1

SHIGIYA	CNC Precision Grinding < Cylindrical Machine >	GP-30B-40ND2 < FANUC-0GC >	1990 / Mar < #310113 >
---------	---	-------------------------------	---------------------------

■ MAIN SPECIFICATION ■

❑ NC円筒研削盤	❑ CNC Precision Cylindrical Grinding
❑ 振り(直径):Φ300	❑ Max.Swing: Φ300
❑ センター間距離:400	❑ Distance Between Center: 400
❑ といし(外径*幅*内径):405*50*152.4	❑ Grinding Wheel (405*50*152.4)
❑ 主軸回転数:15~600rpm	❑ Main Spindle Speed: 15~600rpm
❑ 主軸台:MT No.4	❑ Taper Size of Headstock: MT No.4
	❑
	❑
	❑
❑ 機械重量:2,900kg	❑ Machine Weight: 2,900kg

※注記 << 機械仕様等については現物優先となります >>  
<< Regarding machine specifications, etc., priority will given to the actual product >>

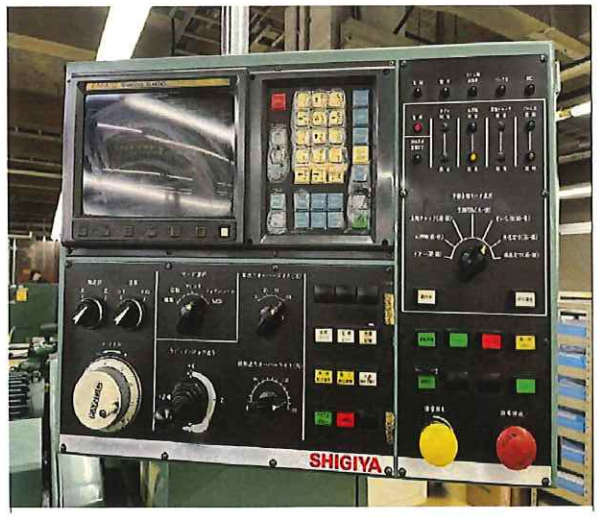

CNC円筒研削盤

# ND2 SERIES

□特別仕様

CNC円筒研削盤						CNC万能研削盤					
GP-30B			GP-40B			GU-30B			GU-40B		
40ND2	60ND2	100ND2	40ND2	60ND2	100ND2	40ND2	60ND2	100ND2	40ND2	60ND2	100ND2
	300			410			300			410	
400	600	1000	330	530	930	400	600	1000	330	530	930
				—			300			410	
	300			360			300			410	
	255			255			—			—	
	130			150			130			150	
非旋回式 φ405×50×φ152.4 1545・1750 2075・2350						右旋回 30 φ355×32×φ152.4 1675・1995					
244						244					
40						40					
0~10000(4段)						0~10000(4段)					
0~2520(16段)						0~2520(16段)					
0.01~9.99						0.01~9.99					
0~150(10%毎)						0~150(10%毎)					
0.001						0.001					
9.999						9.999					
0.001~0.099						0.001~0.099					
0~99.9						0~99.9					
0~99						0~99					
デッド主軸・非旋回式						デッド、ライブ併用主軸・旋回式					
15~600						15~600					
NO. 4						NO. 4					
30						30					
NO. 4						NO. 4					
11	9	7	11	9	7	11	9	7	11	9	7
0	0	0	0	0	0	0	0	0	0	0	0
0~7000(4段)						0~7000(4段)					
0~1260(16段)						0~1260(16段)					
0~7000						0~7000					
0~150(10%毎)						0~150(10%毎)					
0.001						0.001					
3.7						3.7					
5.5						5.5					
1.5						1.5					
0.6						0.6					
0.9						0.9					
0.75						0.75					
0.2						0.2					
0.18						0.18					
0.18						0.18					
12						12					
54						54					
120						120					
1090			1145			1090			1145		
2900	3200	3900	3000	3300	4000	2900	3200	3900	3000	3300	4000

\*改良により予告なく仕様その他を変更することがあります。